(19) World Intellectual Property Organization International Bureau



- 1917 (1909) (1909) (1909) (1909) (1909) (1909) (1909) (1909) (1909) (1909) (1909) (1909)

(43) International Publication Date 23 June 2005 (23.06.2005)

PCT

(10) International Publication Number WO 2005/057905 A2

(51) International Patent Classification7:

H04N

(21) International Application Number:

PCT/US2004/040442

- (22) International Filing Date: 3 December 2004 (03.12.2004)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 60/527,900


5 December 2003 (05.12.2003) US

- (71) Applicant (for all designated States except US): NEW JERSEY INSTITUTE OF TECHNOLOGY [US/US]; Cullimore Hall, University Heights, Newark, NJ 07102-1982 (US).
- (72) Inventors: SHI, Yun-Qing; 28 Parkview Drive, Millburn, NJ 07041 (US). ZOU, Dekun; 33 Tappan St., Kearny, NJ 07032 (US). NI, Zhi-Cheng; 385 Elm Street, Kearny, NJ 07032 (US).

- (74) Agent: DERNIER, Matthew, B.; Kaplan & Gilman, L.L.P., 900 Route 9 North, Suite 104, Woodbridge, NJ 07095 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FL, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM, European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR ROBUST LOSSLESS DATA HIDING AND RECOVERING FROM THE INTEGER WAVELET REPRESENTATION

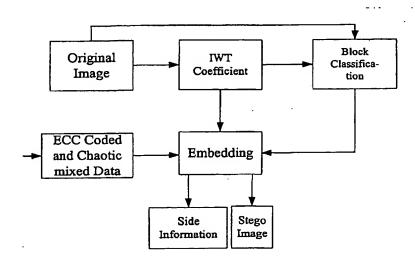

(57) Abstract: A method is provided which comprises providing a block of IWT (integer wavelet transform) coefficients for preferably one high frequency sub-band of an image; determining a mean value of said coefficients within said block; and establishing an encoded mean value to embed one of a logical-0 it value and a logical-1 bit into said first block.